




SECTION A-A

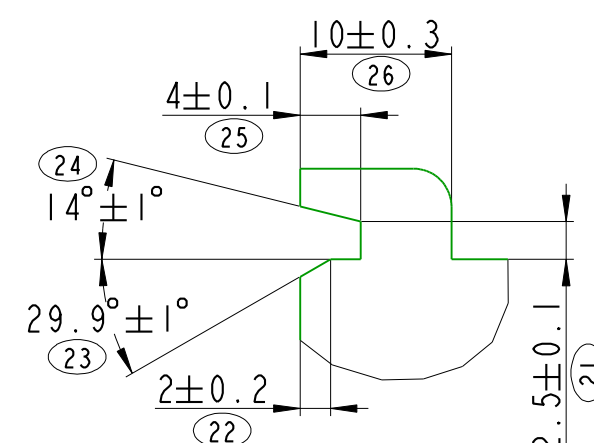



DETAIL A
SCALE 2:1

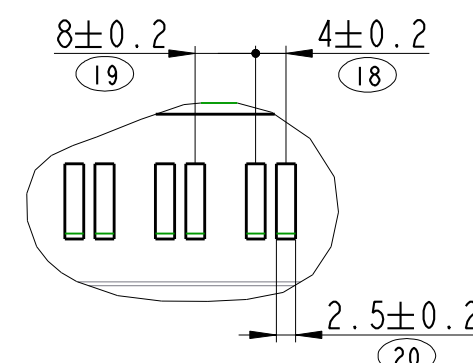

DETAIL B
SCALE 1:1

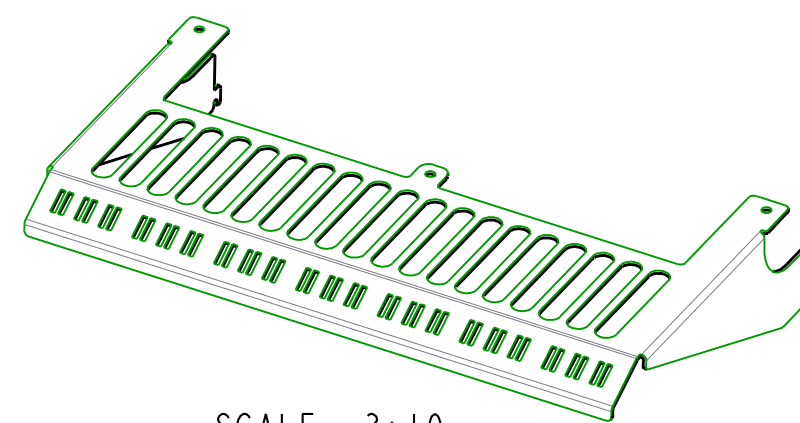

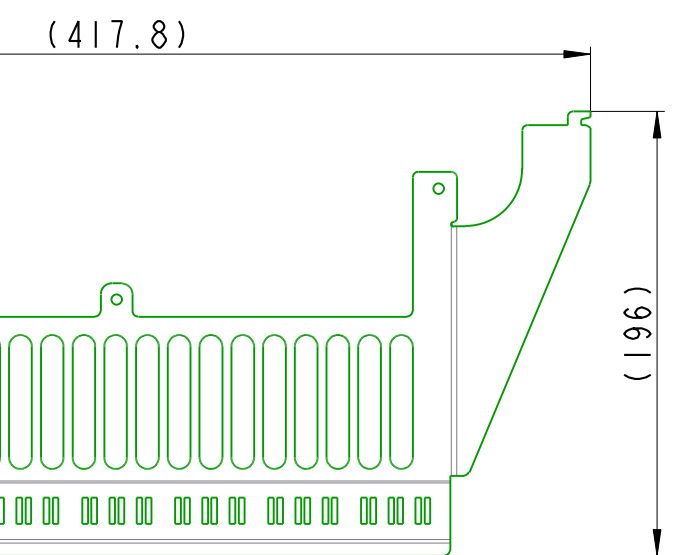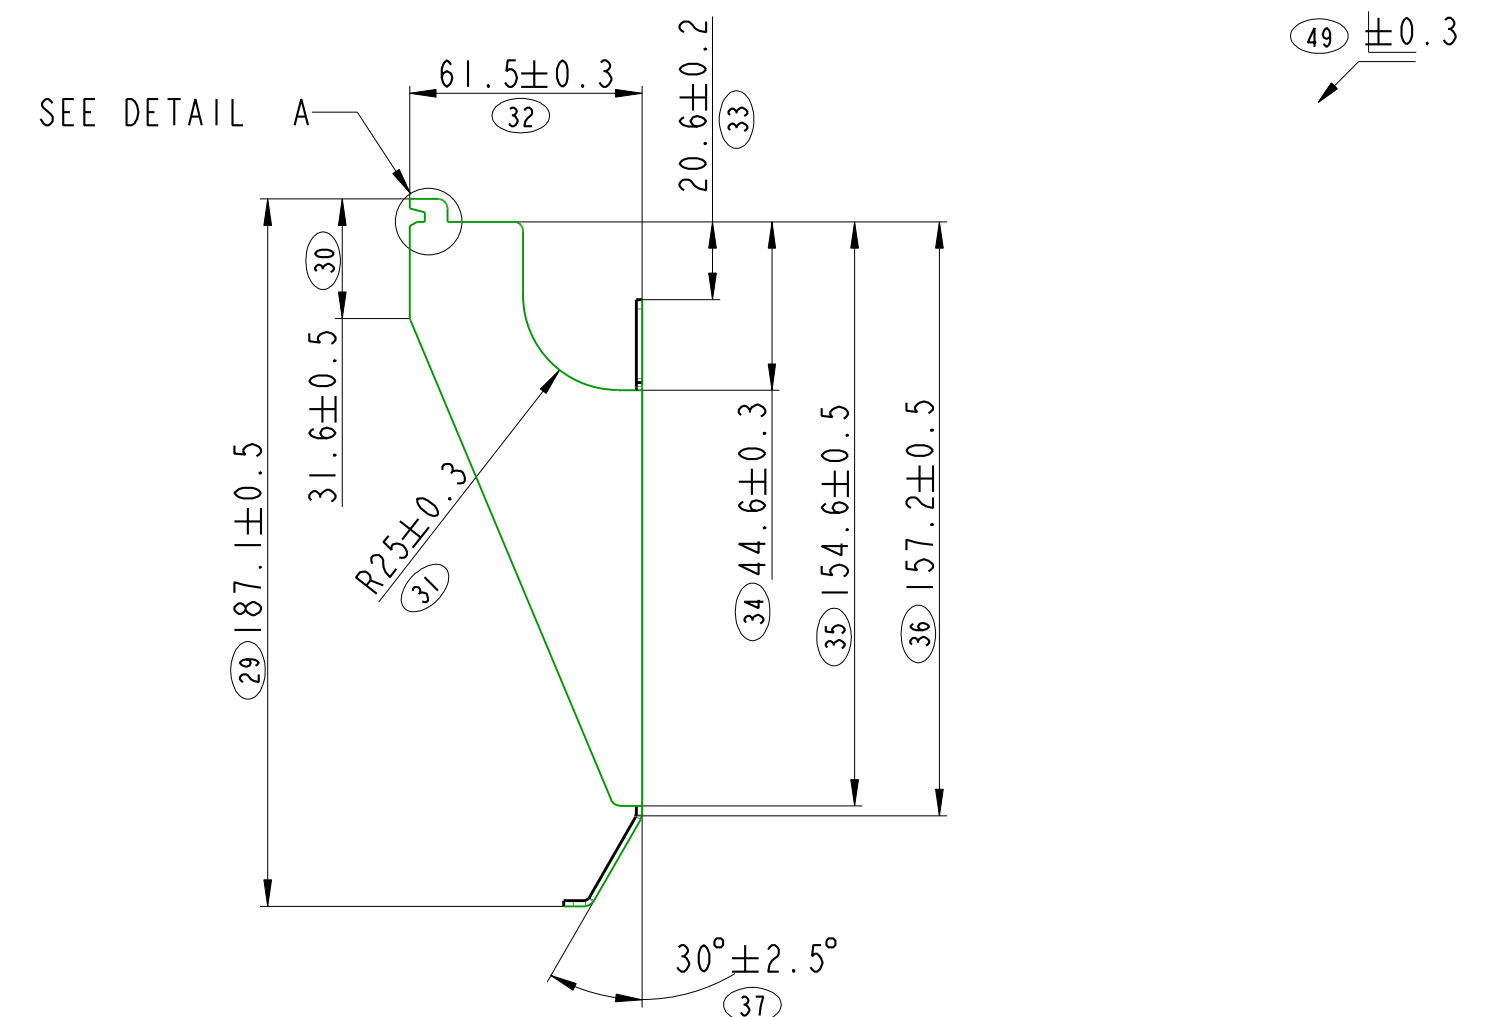

SCALE 3:10



Unfolded

- (38) Critical Characteristic dimension No. 17
 (39) Dimensions not specified: Acc. to CAD file.
 (40) General inside bending radius shall be less than 1mm.
 (41) Tolerances for not specified dimension: ± 0.2 .
 (42) Bend angle tolerances for not specified: $\pm 0.5^\circ$.
 (43) Corner radius for not specified dimension: Acc. to CAD file.
 (44) Part must be washed and degreased.
 (45) No impact marks on surfaces.
 (46) Scratches to be avoided on surfaces.
 (47) Material specification: 1.5 mm Sheet
 acc. to EN 10346-DX51D+AZ150-N-A-C
 (48) Has to comply with RoHS directive

PDM controlled drawing. Hard copy not valid without frozen date in ID Stamp		Projection 	Scale 1:2	Size A2	Material _____ see note _____
					Designation \ Name Power decoupling plate, J7
Replace					
Designer	Liang wanchun 2013-09-12				
Confidential: Property of Danfoss Power Electronics A/S, Grasten, Denmark. Not to be handed over to, copied or used by third party. Two- or three dimensional reproduction of contents to be authorized by Danfoss Power Electronics A/S.					No. 132B3721 Rev. 002 Sheet 1 of 1